


U Support H48, 250mm, with Z-Module Channel


Assembly



Component

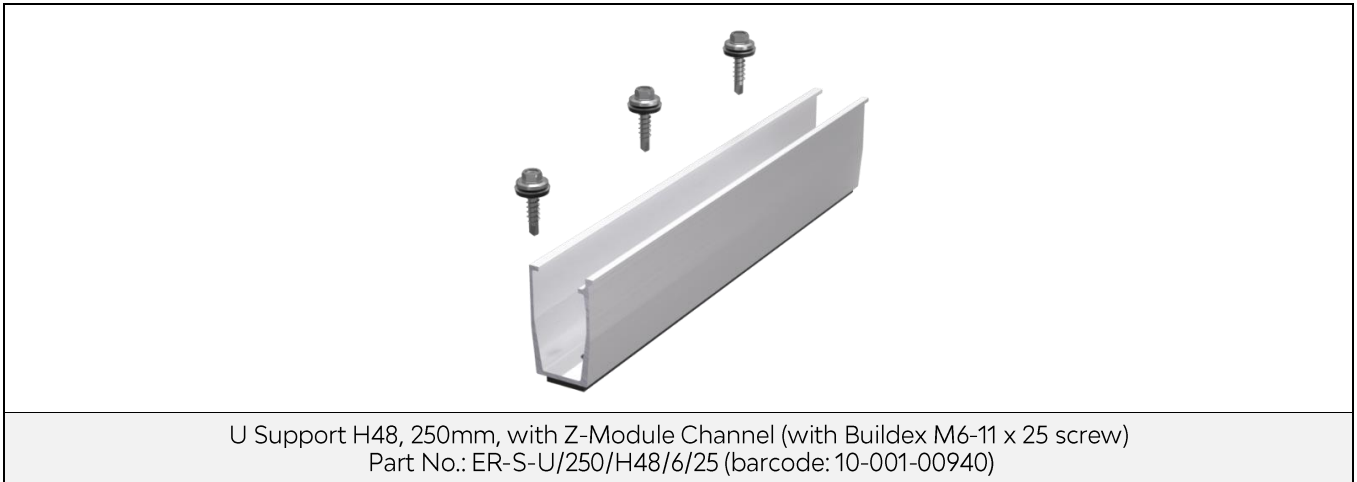

Technical Specification

Application	Trapezoidal Roof	
Roof pitch	From 3° to 45°	
Roof Sheet thickness	G550 Steel: 0.42 – 1.5 mm	
Screw Specification	3 x Self-drilling Buildex M6-11 x 25 screws	
Dimensions	L250*W30*H48mm	
Weight	0.194 kg	
Packaging	90 units per carton	
Material	U Support: AL6005-T5 Bolts: 1022 with Mechanical zinc-tin plating Waterproof mat: EPDM	
Standard	EN1991-1, BS EN1991-3 and BS EN1991-4	