



## Inter Clamp 28-46mm with M module, Length 50mm

### Assembly

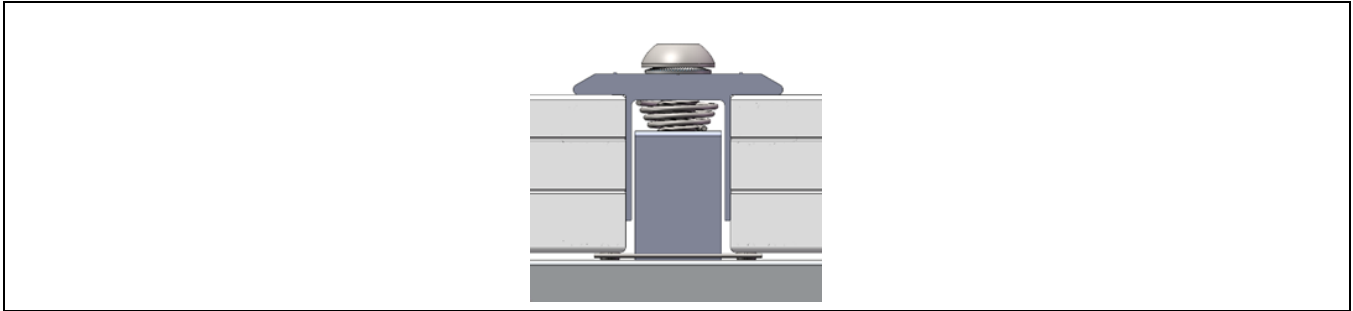


### Component

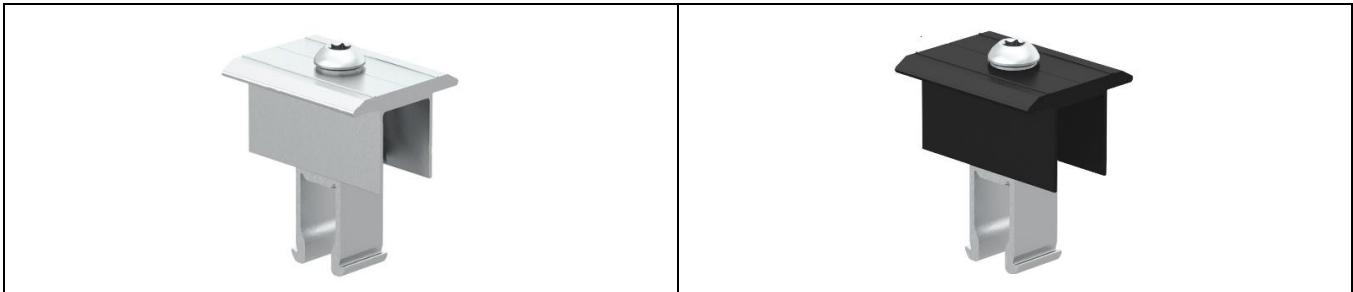

Inter Clamp 28-46mm with M module, Length 50mm  
Part No.: IC-M28-46/L50 (bar code: 10-006-01910), IC-M28-46/L50/BA (bar code: 10-006-01898)

### Technical Specification
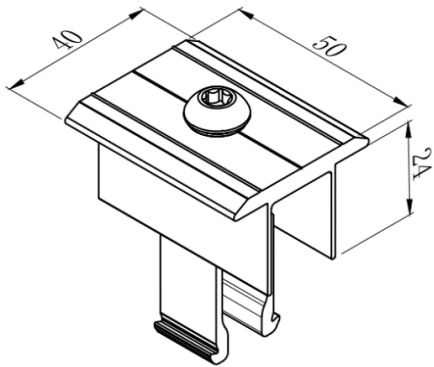
|             |                                                                                                                                     |                                                                                      |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Application | For framed PV Modules of 28-46mm in height                                                                                          |  |
| Requirement | Needs 18mm space on each side of the Rail                                                                                           |                                                                                      |
| Dimensions  | L50mm*W40mm                                                                                                                         |                                                                                      |
| Weight      | 0.0565 Kg                                                                                                                           |                                                                                      |
| Packaging   | 42 units per pack, 4 packs (168 units) per carton                                                                                   |                                                                                      |
| Material    | Main parts: AL6005-T5<br>Bolts/Washers/Springs: SUS 304                                                                             |                                                                                      |
| Finish      | IC-M28-46/L50 : Anodised (no less than 10 µm, excluding machined surfaces)<br>IC-M28-46/L50/BA: Black Anodised (no less than 10 µm) |                                                                                      |
| Standard    | GB50797   AS NZS1170.2-2021   EN1991   JISC8955   ASCE 7-10                                                                         |                                                                                      |