

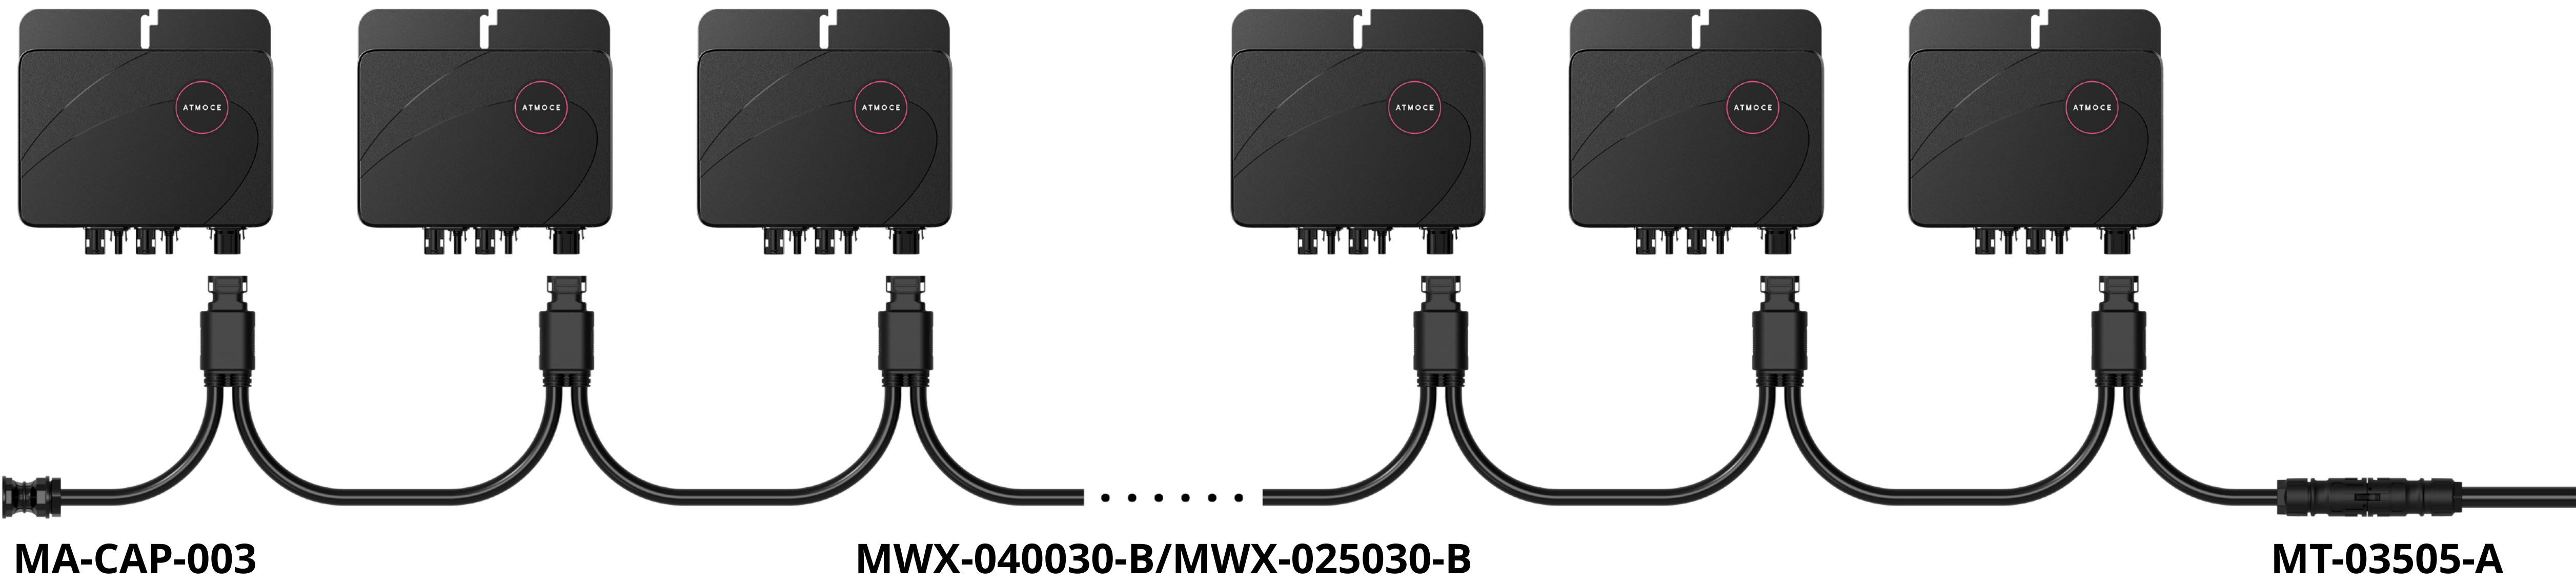


M-CableX

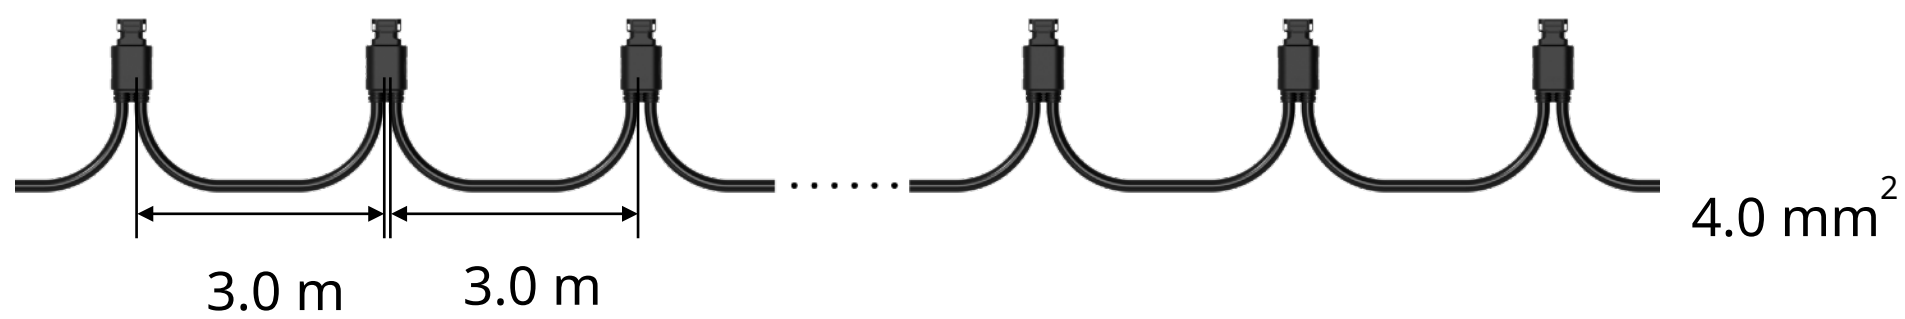

Model	MWX-040030-B	MWX-025030-B
Product	Three-phase four-core AC cable	
Type	H07RN-F	
Copper conductor	 4.0 mm ²	 2.5 mm ²
Max. terminal count	75 terminals	90 terminals
Terminal spacing	3.0 m	
Temperature	90 °C	
Voltage rating	600 V (connector rating 300 V)	
Maximum nominal voltage	300 Vac	
Scenario	Installation of PV modules	
Compliance	IEC 61984:2008, EN 61984:2009	

MA-CAP-003

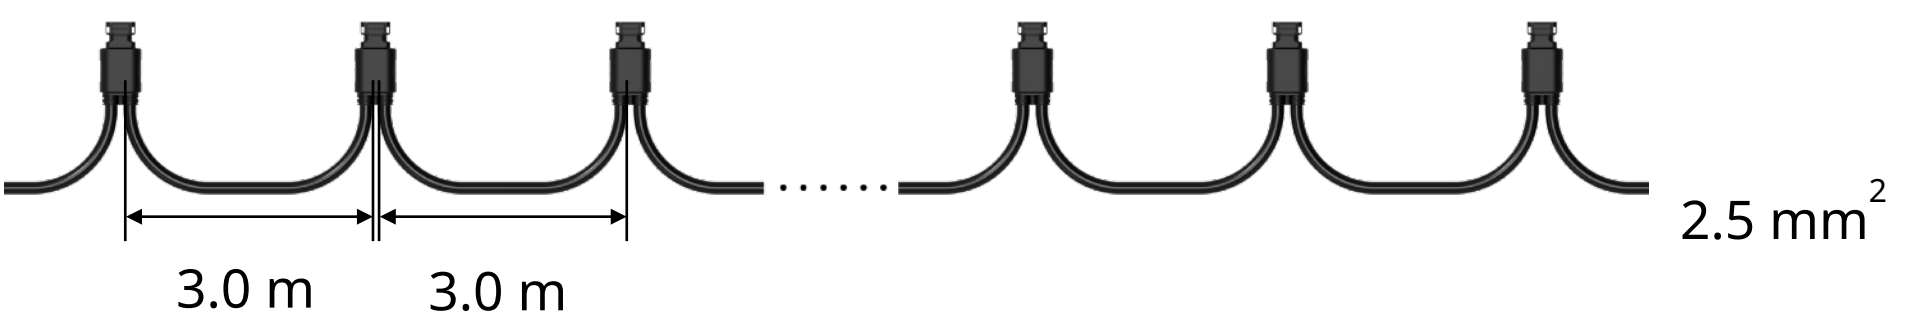

Used to cover unused AC terminals

MT-03505-A



Used to connect AC cables