



N-Type ABC Neostar Series

AIKO-A-MAH54Mb

Up to **23.6%**
445W-460W



Product
Warranty



Performance
Warranty



reddot winner 2023

Full Black Design

No grid lines on the front

Higher Power Output

Higher efficiency: 23.6%

Lower degradation: 1 year $\leq 1.0\%$, 2 -30 year $\leq 0.35\%$

Better temperature coefficient: $-0.26\%/^{\circ}\text{C}$

Optimized Balance of System (BOS)

Significant savings on mounting structure, cabling, and labour cost

Complete Set of Quality Management System

IEC 61730 (2016) IEC 61215 (2021)

ISO 9001:2015 Quality Management System

ISO 14001:2015 Environmental Management System

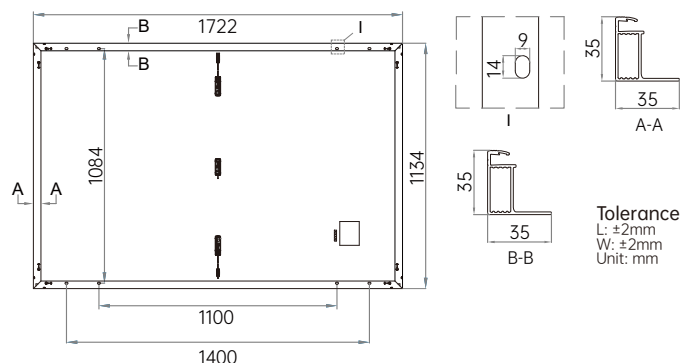
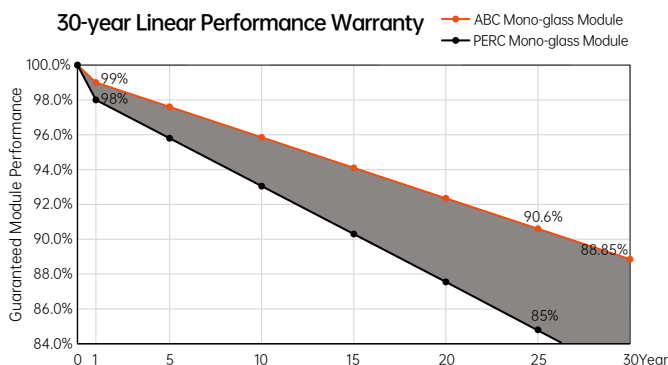
ISO 45001:2018 Occupational Safety and Management System



460W
Output

23.6%
Efficiency

 $\leq 1\%$
First-year Degradation

 $\leq 0.35\%$
Annual Degradation from Year 2-30

Electrical Characteristics (STC: AM1.5 1000W/m² 25°C NOCT: AM1.5 800W/m² 20°C 1m/s)

Power Tolerance: 0~ + 3%

Model	AIKO-A445-MAH54Mb		AIKO-A450-MAH54Mb		AIKO-A455-MAH54Mb		AIKO-A460-MAH54Mb	
Test Conditions	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
P_{max} [W]	445	335	450	339	455	343	460	346
V_{oc} [V]	40.60	38.34	40.70	38.44	40.80	38.53	40.90	38.63
V_{mp} [V]	33.60	31.73	33.70	31.82	33.80	31.92	33.90	32.01
I_{sc} [A]	13.86	11.21	13.92	11.26	13.98	11.31	14.04	11.36
I_{mp} [A]	13.25	10.57	13.36	10.66	13.47	10.75	13.58	10.84
Module Efficiency	22.8%		23.0%		23.3%		23.6%	

Mechanical Specification

Cell Type	N-Type ABC
Front Cover Mono glass	3.2 mm tempered glass
Frame	Black anodized aluminum
Cable	4mm ² (IEC) 12AWG(UL) 350mm or Customized Length
No. of Cells	108(6*18)
Junction Box	IP68, three bypass diodes
Connector	MC4 EVO2
Weight	21.6kg±3%
Dimension	1722*1134*35mm
Package Detail	31pcs per pallet/186 pcs per 20' GP/806pcs per 40' HQ

Temperature Ratings (STC)

Temperature Coefficient of I_{sc}	+ 0.05%/ °C
Temperature Coefficient of V_{oc}	- 0.22%/ °C
Temperature Coefficient of P_{max}	- 0.26%/ °C

Installation Guide

Operation Temperature	- 40°C~+85°C
Maximum Series Fuse Rating	25A
Protection Class	Class II
V_{oc} and I_{sc} Tolerance	±3%
Maximum System Voltage	DC1500V
Maximum Static Loading	Front 5400Pa Back 2400Pa
Hail Test	25 mm diameter hail at 23 m/s
Fire Rating	IEC Class C